


DIMENSIONS:	
A	2.875" ±0.063
B	1.900" ±0.125
C	2.370" ±0.063
D	2.375" ±0.063
G	0.187" ±0.015

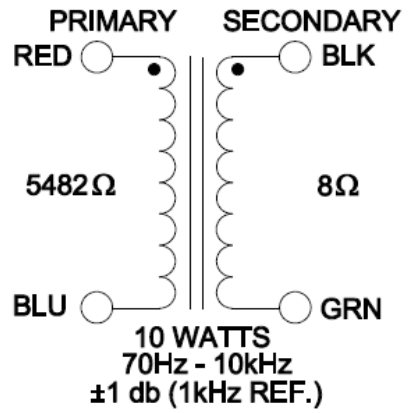

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I <sub>ex</sub>	@ 234V, 400Hz, RED - BLU	17.88mA      Max.
Sec. N.L.V	@ 234V, 400Hz, RED - BLU	
	BLK - GRN =	8.882V      ±2%
DCR	@ 20°C, RED - BLU =	254.6 Ω      ±20%
	@ 20°C, BLK - GRN =	0.420 Ω      ±20%
HIPOT	PRIMARY - SECONDARY	1750V, 60Hz, 1 SEC