



DIMENSIONS:	
A	2.500" ±0.063
B	3.125" ±0.063
C	3.810" ±0.125
D	2.060" ±0.063
F	2.885" ±0.063
G	1.560" ±0.063
H	3.750" ±0.063
J	3.125" ±0.063

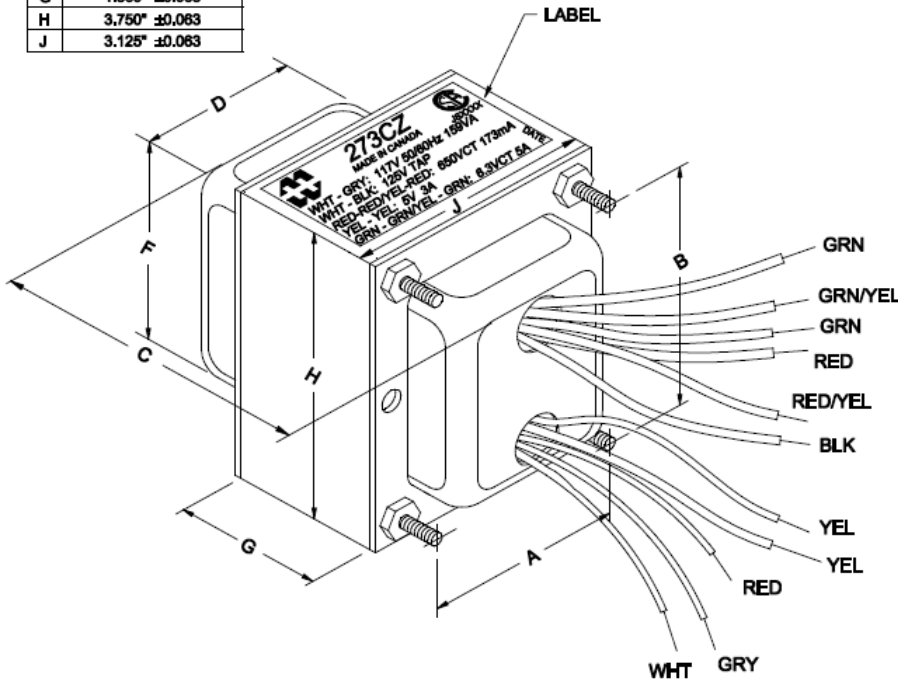

NOTE: ALL LEADS 6" OUT MIN. STRIPPED 0.5"

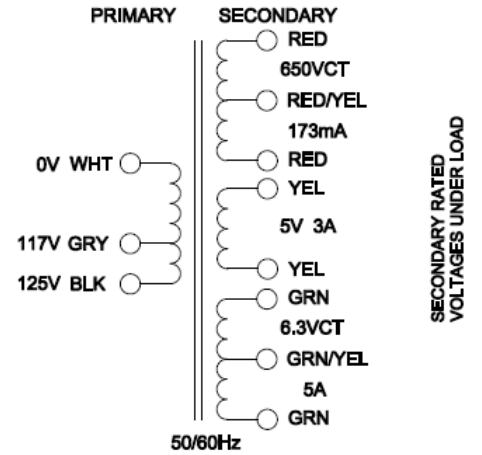

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 125V, 60Hz, WHT - BLK	169.2mA Max.
Sec. N.L.V	@ 125V, 60Hz, WHT - BLK	
	RED - RED =	688.6V ±2%
	RED - RED/YEL = RED/YEL - RED =	344.3V ±2%
	YEL - YEL =	5.482V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.289V ±2%
	GRN - GRN =	6.579V ±2%
DCR	@ 20°C, WHT - BLK =	2.147 Ω ±20%
	@ 20°C, RED - RED =	111.2 Ω ±20%
	@ 20°C, YEL - YEL =	0.051 Ω ±20%
	@ 20°C, GRN - GRN =	0.041 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC