



DIMENSIONS:	
A	2.813" ±0.063
B	3.560" ±0.125
C	3.421" ±0.063
D	2.250" ±0.063
E	2.375" ±0.063
G	0.203" x 0.375" ±0.015

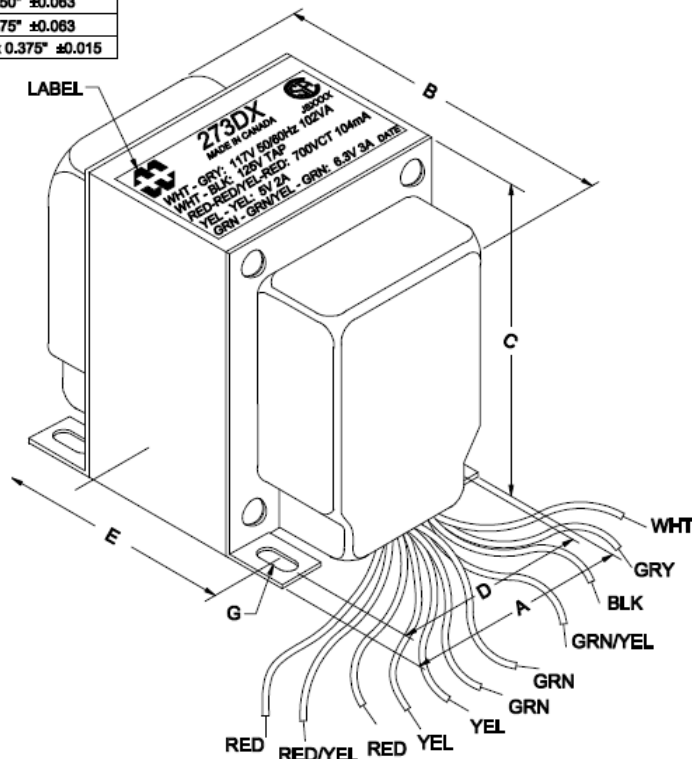

NOTE: ALL LEADS 6" OUT MIN. STRIPPED 0.5"

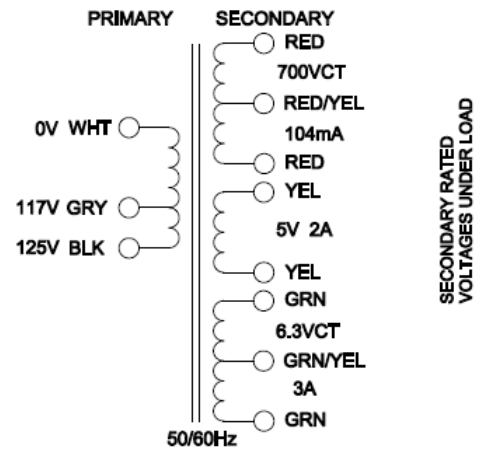

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
Iex	@ 125V, 60Hz, WHT - BLK	310.8mA Max.
Sec. N.L.V	@ 125V, 60Hz, WHT - BLK	
	RED - RED =	738.3V ±2%
	RED - RED/YEL = RED/YEL - RED =	369.1V ±2%
	YEL - YEL =	5.510V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.444V ±2%
	GRN - GRN =	6.887V ±2%
DCR	@ 20°C, WHT - BLK =	3.756 Ω ±20%
	@ 20°C, RED - RED =	163.6 Ω ±20%
	@ 20°C, YEL - YEL =	0.052 Ω ±20%
	@ 20°C, GRN - GRN =	0.068 Ω ±20%
HIPOT	PRIMARY - SECONDARY	3000V, 60Hz, 1 SEC