



DIMENSIONS:

A	3.125" ±0.063
B	3.750" ±0.125
C	3.610" ±0.063
D	2.500" ±0.063
E	2.438" ±0.063
G	0.203" x 0.400" ±0.015

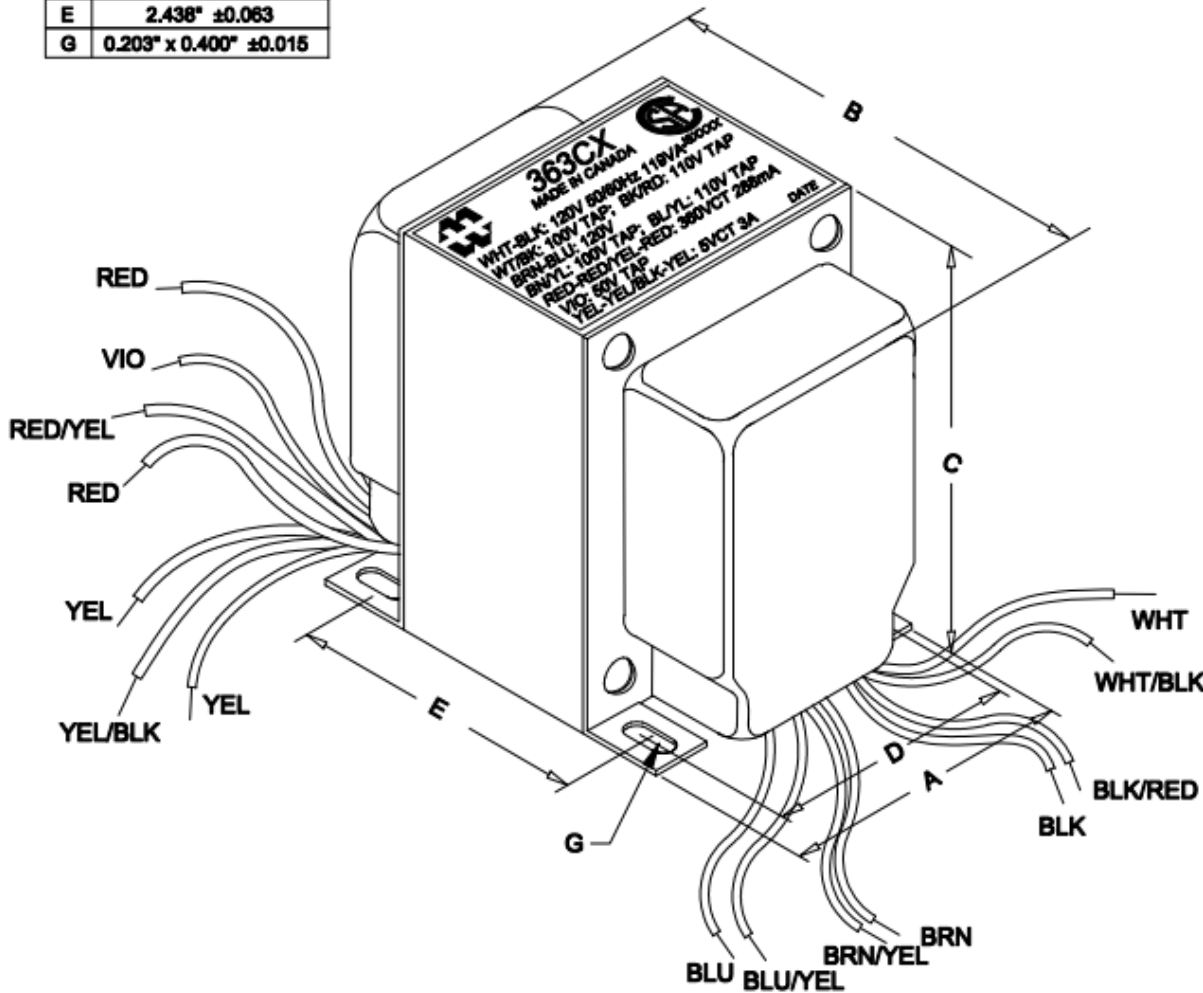

NOTE: ALL LEADS 8" OUT MIN. STRIPPED 0.5"

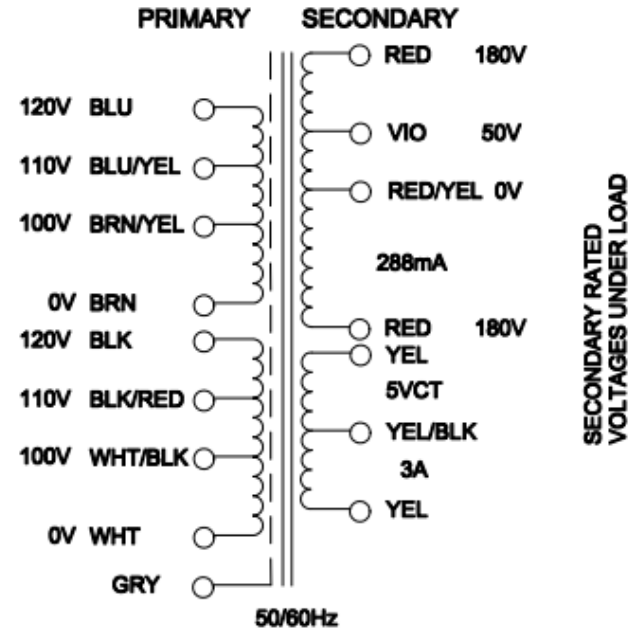

GRY - ELECTROSTATIC SHIELD

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 120V, 60Hz, WHT - BLK	220mA	Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK		
	RED - RED =	385.2V	±2%
	RED - RED/YEL = RED/YEL - RED =	192.8V	±2%
	RED/YEL - VIO =	50.08V	±2%
	YEL - YEL =	5.378V	±2%
	YEL - YEL/BLK = YEL/BLK - YEL =	2.689V	±2%
DCR	@ 20°C, WHT - BLK =	5.943 Ω	±20%
	@ 20°C, BRN - BLU =	6.401 Ω	±20%
	@ 20°C, RED - RED =	46.21 Ω	±20%
	@ 20°C, YEL - YEL =	0.069 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	