



DIMENSIONS:

A	3.125" ±0.063
B	4.186" ±0.125
C	3.800" ±0.063
D	2.500" ±0.063
E	2.938" ±0.063
G	0.203" x 0.400" ±0.015

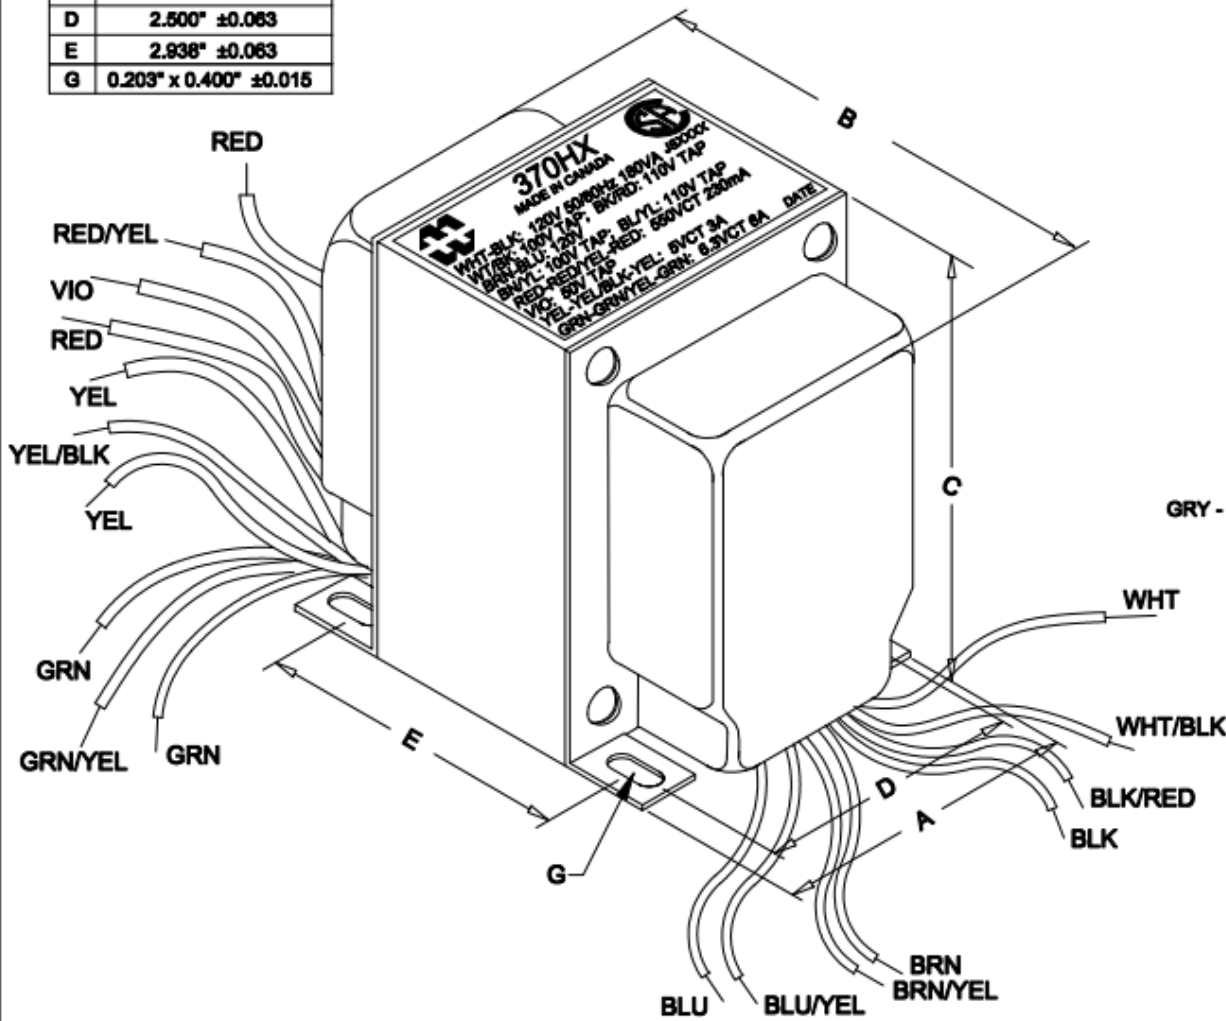

NOTE: ALL LEADS 8" OUT MIN. STRIPPED 0.5

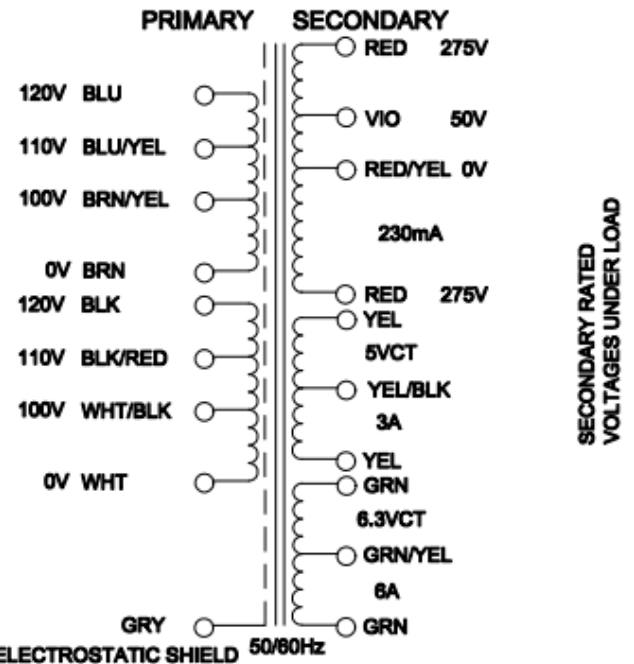

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 120V, 60Hz, WHT - BLK	221mA	Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK		
	RED - RED =	581.8V	±2%
	RED - RED/YEL = RED/YEL - RED =	290.9V	±2%
	RED/YEL - VIO =	51.84V	±2%
	YEL - YEL =	5.780V	±2%
	YEL - YEL/BLK = YEL/BLK - YEL =	2.880V	±2%
	GRN - GRN =	6.720V	±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.360V	±2%
DCR	@ 20°C, WHT - BLK =	3.075 Ω	±20%
	@ 20°C, BRN - BLU =	3.328 Ω	±20%
	@ 20°C, RED - RED =	71.20 Ω	±20%
	@ 20°C, YEL - YEL =	0.046 Ω	±20%
	@ 20°C, GRN - GRN =	0.035 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	